


- Designed to meet UL 60950
- Working voltage up to 250Vrms
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



### Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V		LL@100KHz 0.1V	Hi-Pot	
MP0636JNL	(1-5):(10-6),(tie2+4,9+7)	(1-5),(tie2+4)		(1-5),(tie2+4, 6+7+9+10)	PRI TO SEC	
	1.6:1 ±2%	410μH±5%		10μH MAX	6000VDC,1mA 3s	
	DCR			CWW@100KHz 0.1V	THD	
	1-4	2-5	9-6	10-9	(1-10),(tie1+2+4+5,6+7+9+10)	30KHZ 4.5V
	0.6Ω MAX	0.6Ω MAX	0.5Ω MAX	0.4Ω MAX	35pF MAX	-80dB MAX

### DIMENSIONS (unit: inch/mm):

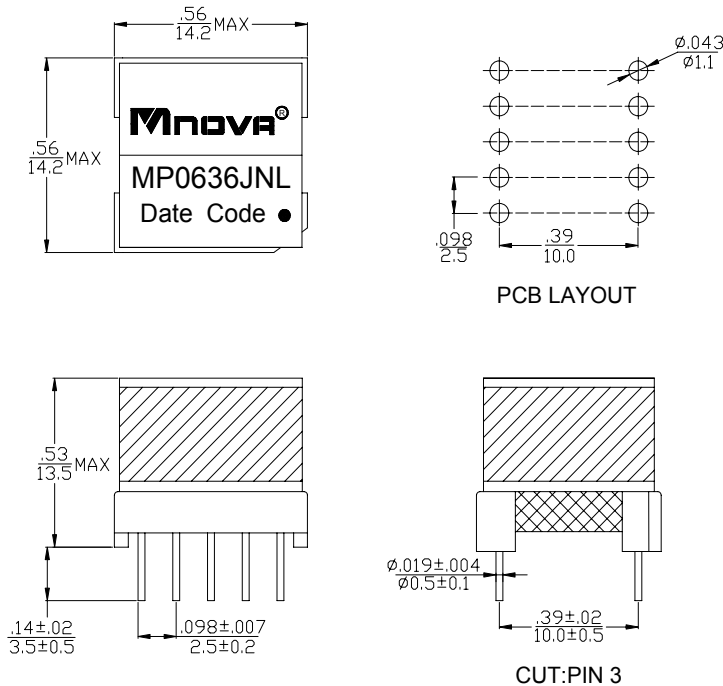

### SCHEMATICS:

