





- Designed to meet UL 60950
- Working voltage up to 250Vrms
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



### Electrical Specifications @ 25°C

P/N	T/R		OCL@10KHz 0.1V	Hi-Pot
MP0519PNL	(16-9):(1-4),(tie11+14,2+3)		(16-9),(tie11+14)	PRI TO SEC
	(16-9):(5-8),(tie11+14,6+7)		700μH ±5%	3000VAC,1mA 3s
	4:1±1%		2:1±1%	
	DCR		LL @ 100KHz 0.1V	CWW @ 100KHz 0.1V
	(1-4),(tie2+3)	(5-8),(tie6+7)	(16-9),(tie11+14)	(16-1)
2.0Ω MAX	3.0Ω MAX	5.0Ω MAX	25μH MAX	50pF MAX

### DIMENSIONS (unit: inch/mm):

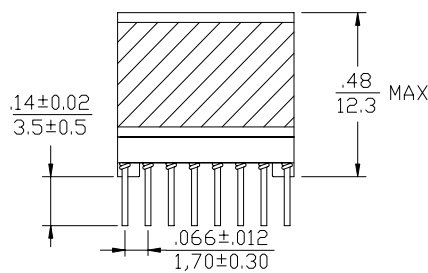

### SCHEMATICS:

