


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



Electrical Specifications @ 25°C					
P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot	
MD0449H	(1-4) : (8-6), (tie2+3, 5+7)	(1-4), ( tie2+3)	(1-4),(tie(2+3, 5+6+7+8)	PRI TO SEC	
	2 : 1 ±1%	420µH±10%	1.3µH MAX	3000V AC 1mA 2s	
	DCR		CWW @ 100KHz 0.1V		
	(1-3) = (2-4)	(8-5) = (7-6)	(1-8), (tie(1+2+3+4, 5+6+7+8)		
	0.65Ω MAX	0.50Ω MAX	70PF MAX		

### DIMENSIONS (unit: inch/mm):

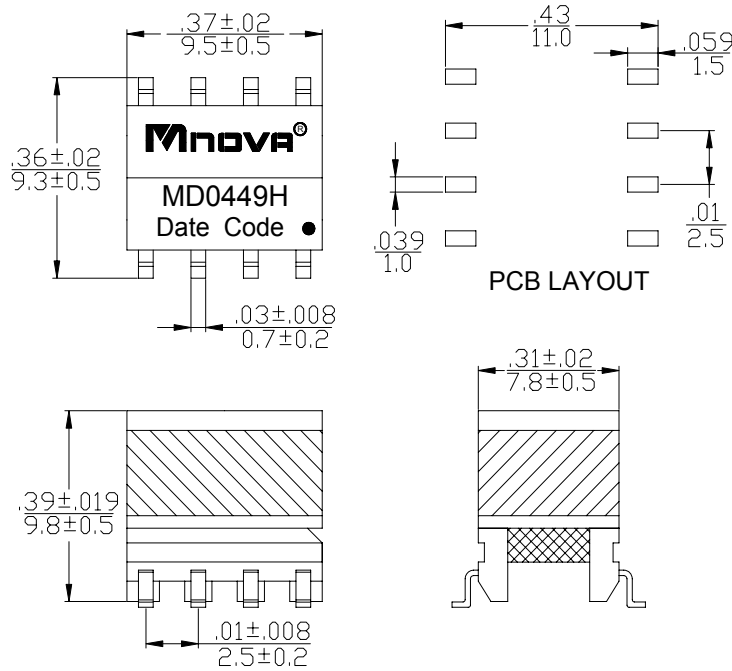

### SCHEMATICS:

