


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



### Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	Hi-Pot
MD1123F	(1-4) : (8-6), (tie2+3,7+5)	(1-4) , (tie2+3)	(1-4)(tie2+3,8+5+7+6)	PRI TO SEC
	2 : 1 ±1%	420µH±10%	2.0µH MAX	1500V AC 1mA 3s
	<b>DCR</b>		<b>CWW @ 100KHz 0.1V</b>	
	(1-4),(tie2+3)	(8-6),(tie5+7)	(1-8),(tie2+3,5+7)	
	1.25Ω MAX	0.45Ω MAX	50PF MAX	

### DIMENSIONS (unit: inch/mm):

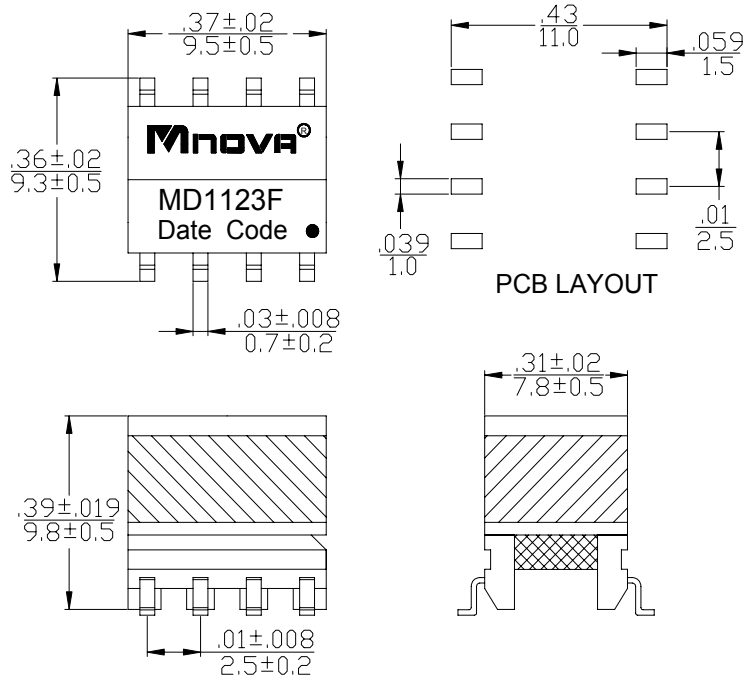

### SCHEMATICS:

