


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@100KHz 0.1V	
MD0692F	(8-5) : (1-4)	(1-4)	(1-4), (tie 8+5)	
	3±3% :1	25µH±10%	0.3µH MAX	
	DCR		Hi-Pot	
	(1-4)	(8-5)	PRI TO SEC	
	0.15Ω MAX	1.5Ω MAX	625V AC 0.5mA 1s	

DIMENSIONS (unit: inch/mm):

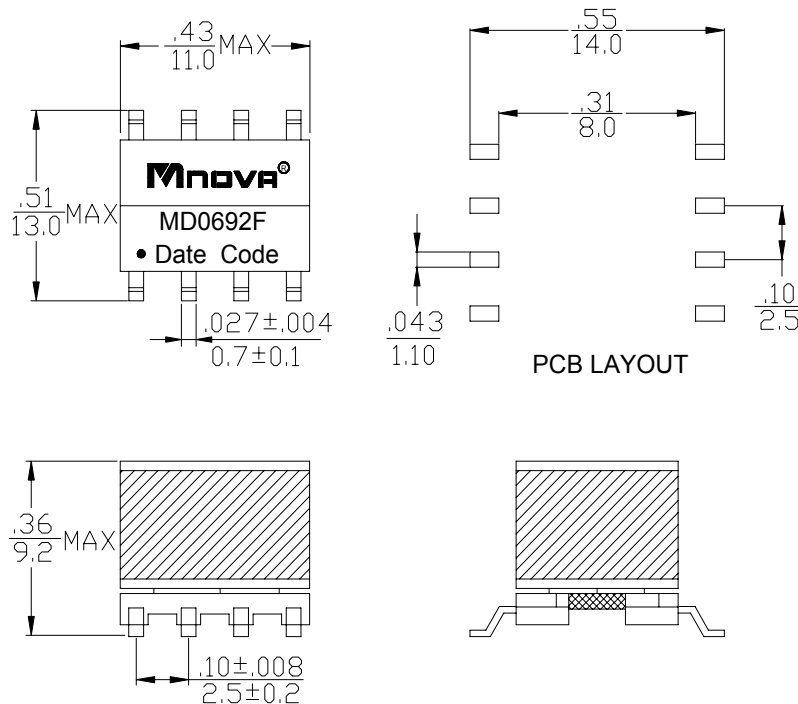

SCHEMATICS:

