


- Designed to meet UL 60950
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range:-40°C TO +85°C .



Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V		LL@100KHz 0.1V	Hi-Pot	
MD0180WNL	(1-4):(8-5),(tie2+3,6+7)	(1-4), (tie2+3)		(1-4),(tie2+3,5+6+7+8)	PRI TO SEC	
	1.33: 1 ±2%	470µH±10%		1.5µH MAX		
	DCR				CWW @ 100KHz 0.1V	THD@30KHz 3.16V
	(1-3)	(2-4)	(8-6)	(5-7)	(1-8),(tie2+3,6+7)	-
	0.6Ω MAX	0.6Ω MAX	0.56Ω MAX	0.65Ω MAX	60PF MAX	-80dB MAX

DIMENSIONS (unit: inch/mm):

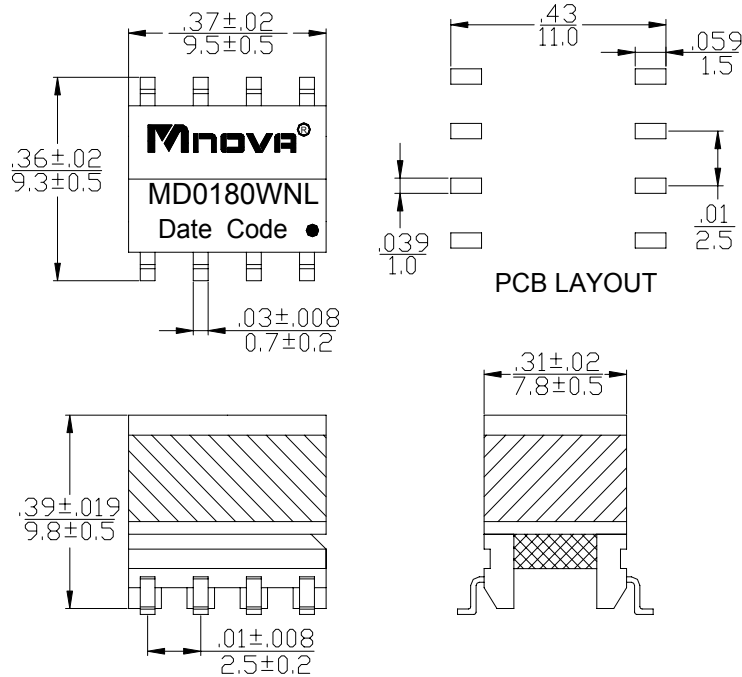

SCHEMATICS:

