


- Designs exceed standards for ANSI and ETSI
- Excellent THD performance
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



Electrical Specifications @ 25°C

P/N	T/R	OCL@10KHz 0.1V	LL@10KHz 0.1V	DCR		HI-POT
				(1-4)=(2-5)	(9-7)	
MT0201	(1-4) : (2-5) : (9-7)	(1-5)	(1-5)(tie2+4,7+9)	(1-4)=(2-5)	(9-7)	PRI TO SEC
	1 : 1 : 1	2.0mH ± 6%	6.5μH MAX	2Ω MAX	1.1Ω MAX	1500VAC 1mA 6s

DIMENSIONS (unit: inch/mm):

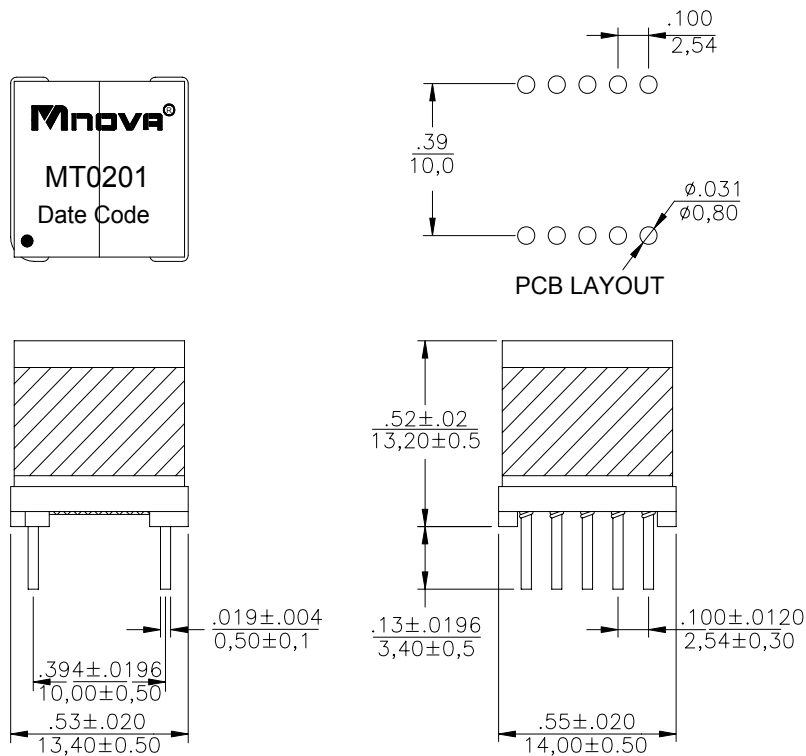

SCHEMATICS:

