


- IEC60950 Compatible
- High insulation type High efficiency
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C



Electrical Specifications @ 25°C

P/N	T/R					OCL @ 100KHz 1.0V		
MD0815E	(1-12):(2-11)	(1-12):(4-9)	(1-12):(5-8)	(1-12):(6-7)	(1-12) : (3-10)	(1-12)		
	1:1	1:1.375	1:1.375	1:2	1:1	9.9μH ±10%		
	DCR						HI - POT	
	(1-12)	(2-11)	(4-9)	(5-8)	(6-7)	(3-10)	PRI TO SEC	
	45mΩ MAX	45mΩ MAX	90mΩ MAX	90mΩ MAX	140mΩ MAX	50mΩ MAX	500V AC 1mA 1s	

DIMENSIONS (unit: inch/mm):

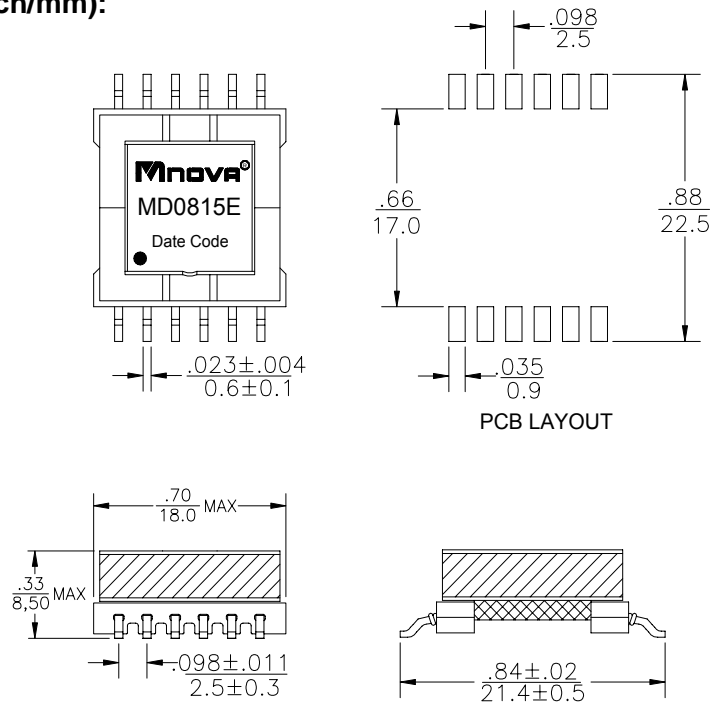

SCHEMATICS:

