


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C



Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@1MHz 1V (µH MIN)		D.C.R (mΩ MAX)			Hi-pot (Vrms)
	(1-2):(3-4):(8-5)	(8-5)	(1-4),(tie2+3)	(1-2)	(3-4)	(8-7)	PRI TO SEC
MD1927Q	4:1:3	4	11	75	10	65	3000

Dimensions (unit: inch/mm)

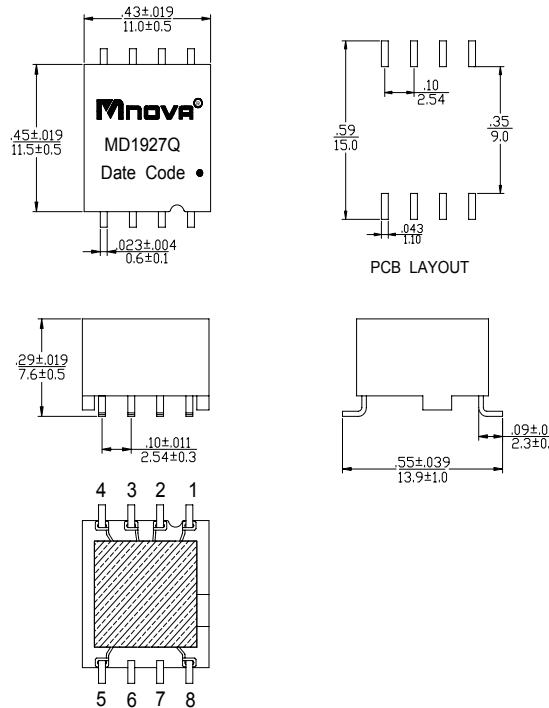

Schematics

