


- Designed to meet UL 60950-1
- Core Material Ferrite
- Isolation 3000 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: 0°C TO +70°C



Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@100KHz 0.1V (μH MIN)	D.C.R (mΩ MAX)		Hi-pot (Vrms)
	(1-2):(3-4):(6-5):(8-7)	(1-4), (tie2+3)	(1-2)=(3-4)=(5-6)	(8-7)	PRI TO SEC
MD2052Q	0.75:0.75:1:1.5	3	160	320	3000

Dimensions (unit: inch/mm)

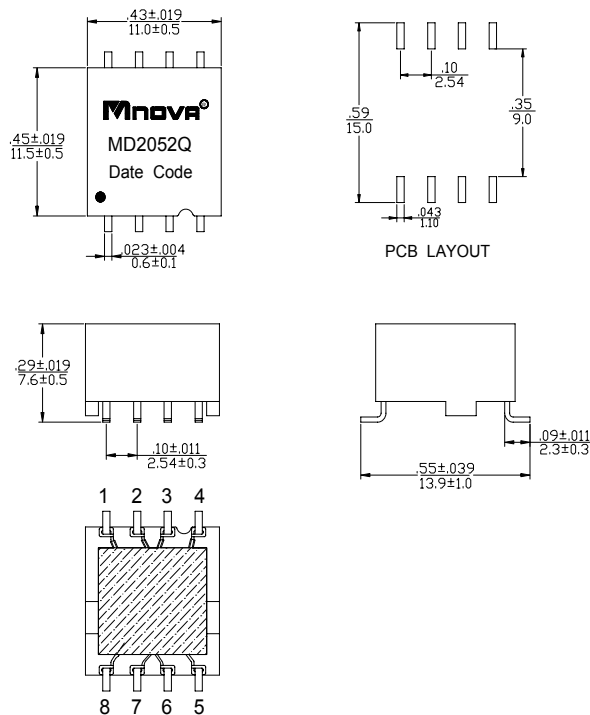

Schematics

