

- Designed to meet UL 60950-1
- Ideally Used In POE Transformer
- Isolation 1500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C




### Electrical Specifications @ 25°C

P/N	T/R (±2%)	OCL@ 400KHz 0.4V (μH ±10%)	LL@ 400KHz 0.4V (μH MAX )	Hi-pot (Vrms)
		(3-2):(5,6-7,8)	(3-2)	(3-2),(tie5+6+7+8)
MD2294W	2.5:1	40	0.34	1500

### Additional Specifications

P/N	D.C.R (mΩ MAX)	
	(3-2)	(5,6-7,8)
MD2294W	98	26

### Dimensions (unit: inch/mm)

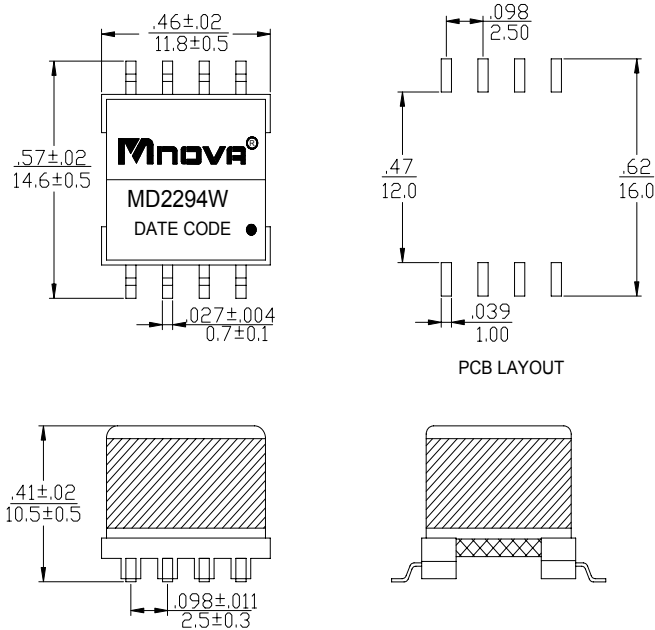

### Schematics

