


- Designed to meet UL 60950-1
- Ideally Used In Power Transformer
- Isolation 1500 Vrms
- Recommended solder profile:Reflow
- ROHS Compliance Product
- Operating Temperature range: -40°C TO +85°C



Electrical Specifications @ 25°C

P/N	T/R (±1%)	OCL@ 100KHz 0.1V (μH MIN)	LL@ 100KHz 0.1V (μH MAX)	Hi-pot (Vrms)
MD2285R	(1-4):(5-8),(tie2+3,6+7)	(1-4),(tie2+3)	(1-4), (tie2+3,5+6+7+8)	PRI TO SEC
	1:1.5	45.6	1	1875VDC
	D.C.R (Ω MAX)			
	(1-4),(tie2+3)		(8-5), (tie6+7)	
		0.13	0.26	

Dimensions (unit: inch/mm)

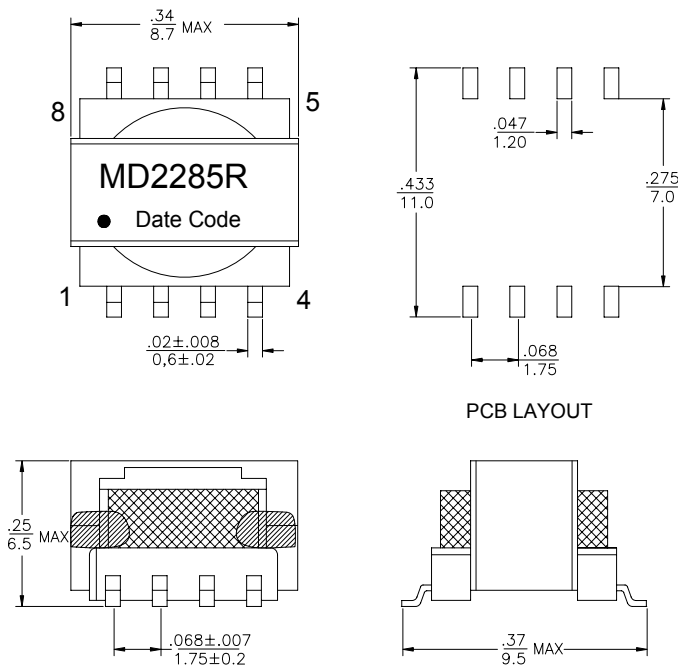

Schematics

